

TYPE-DESCRIPTION

DEGASSING- AND AERATIONSYSTEM TYPE SSK 100 FOR JERRYCANS


Technical Data:

Material: sintered oleo- and hydrophobe
ultra highmolecular HDPE

Chemical Resistanze: against all hazardous liquids

GASFLOW:


Type SSK 100 > 100 l per hour at ΔP 8 kPa

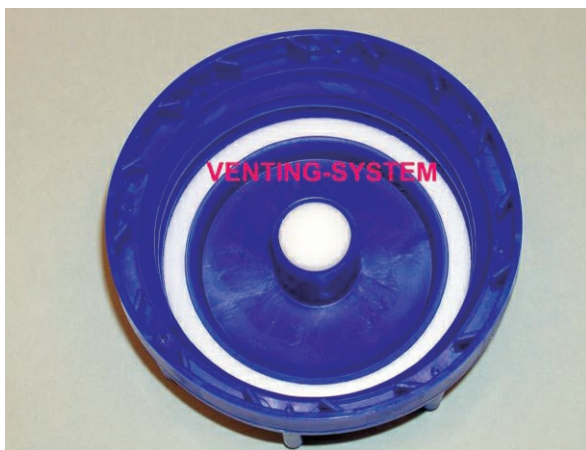


Reduction of gasflow due to contact with the filling-liquid is excluded by the OLEOPHOBIC and HYDROPHOBIC effect of the valve.

The valve can be mounted in ALL CONVENTIONAL degasi-fication-screwcaps for jerrycans.

GASFLOW-CHART

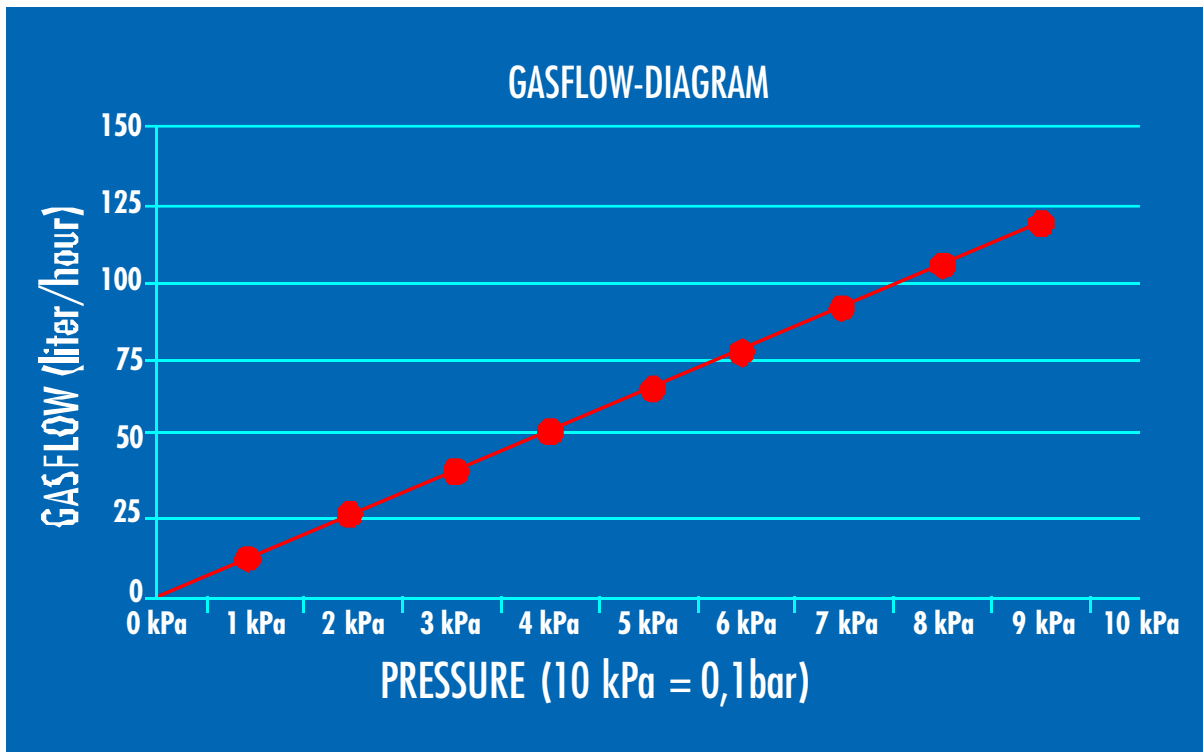

DIMENSIONS IN MM

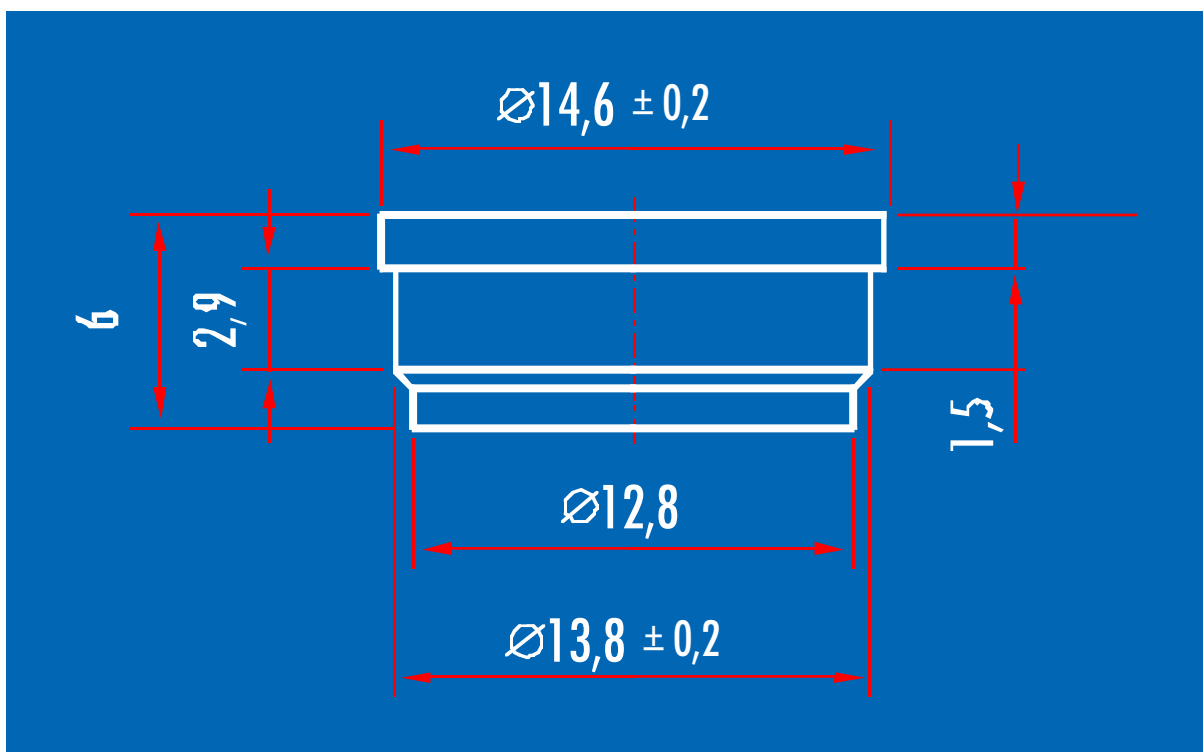

VALVE-SEAT DIMENSIONS IN MM

